

# 6 数控齿条加工机床



CNC RACK GEAR MACHINE SERIES

## 精密齿条制齿的全工艺制造机床 为客户提供全套解决方案

针对于汽车行业、电梯、工程机械、机床等行业的精密磨削加工。是单件加工或是小批量生产，亦或是大批量成型精密加工，我们都能全面为客户提供解决方案。

The whole process manufacturing machine for precision rack teeth provides customers with complete sets of solutions.

For precision rack processing in the automotive industry, elevators, construction machinery, machine tools and other industries; whether it is single-piece processing, or efficient small-batch production, or high-precision processing, we can provide you with a full set of solutions.

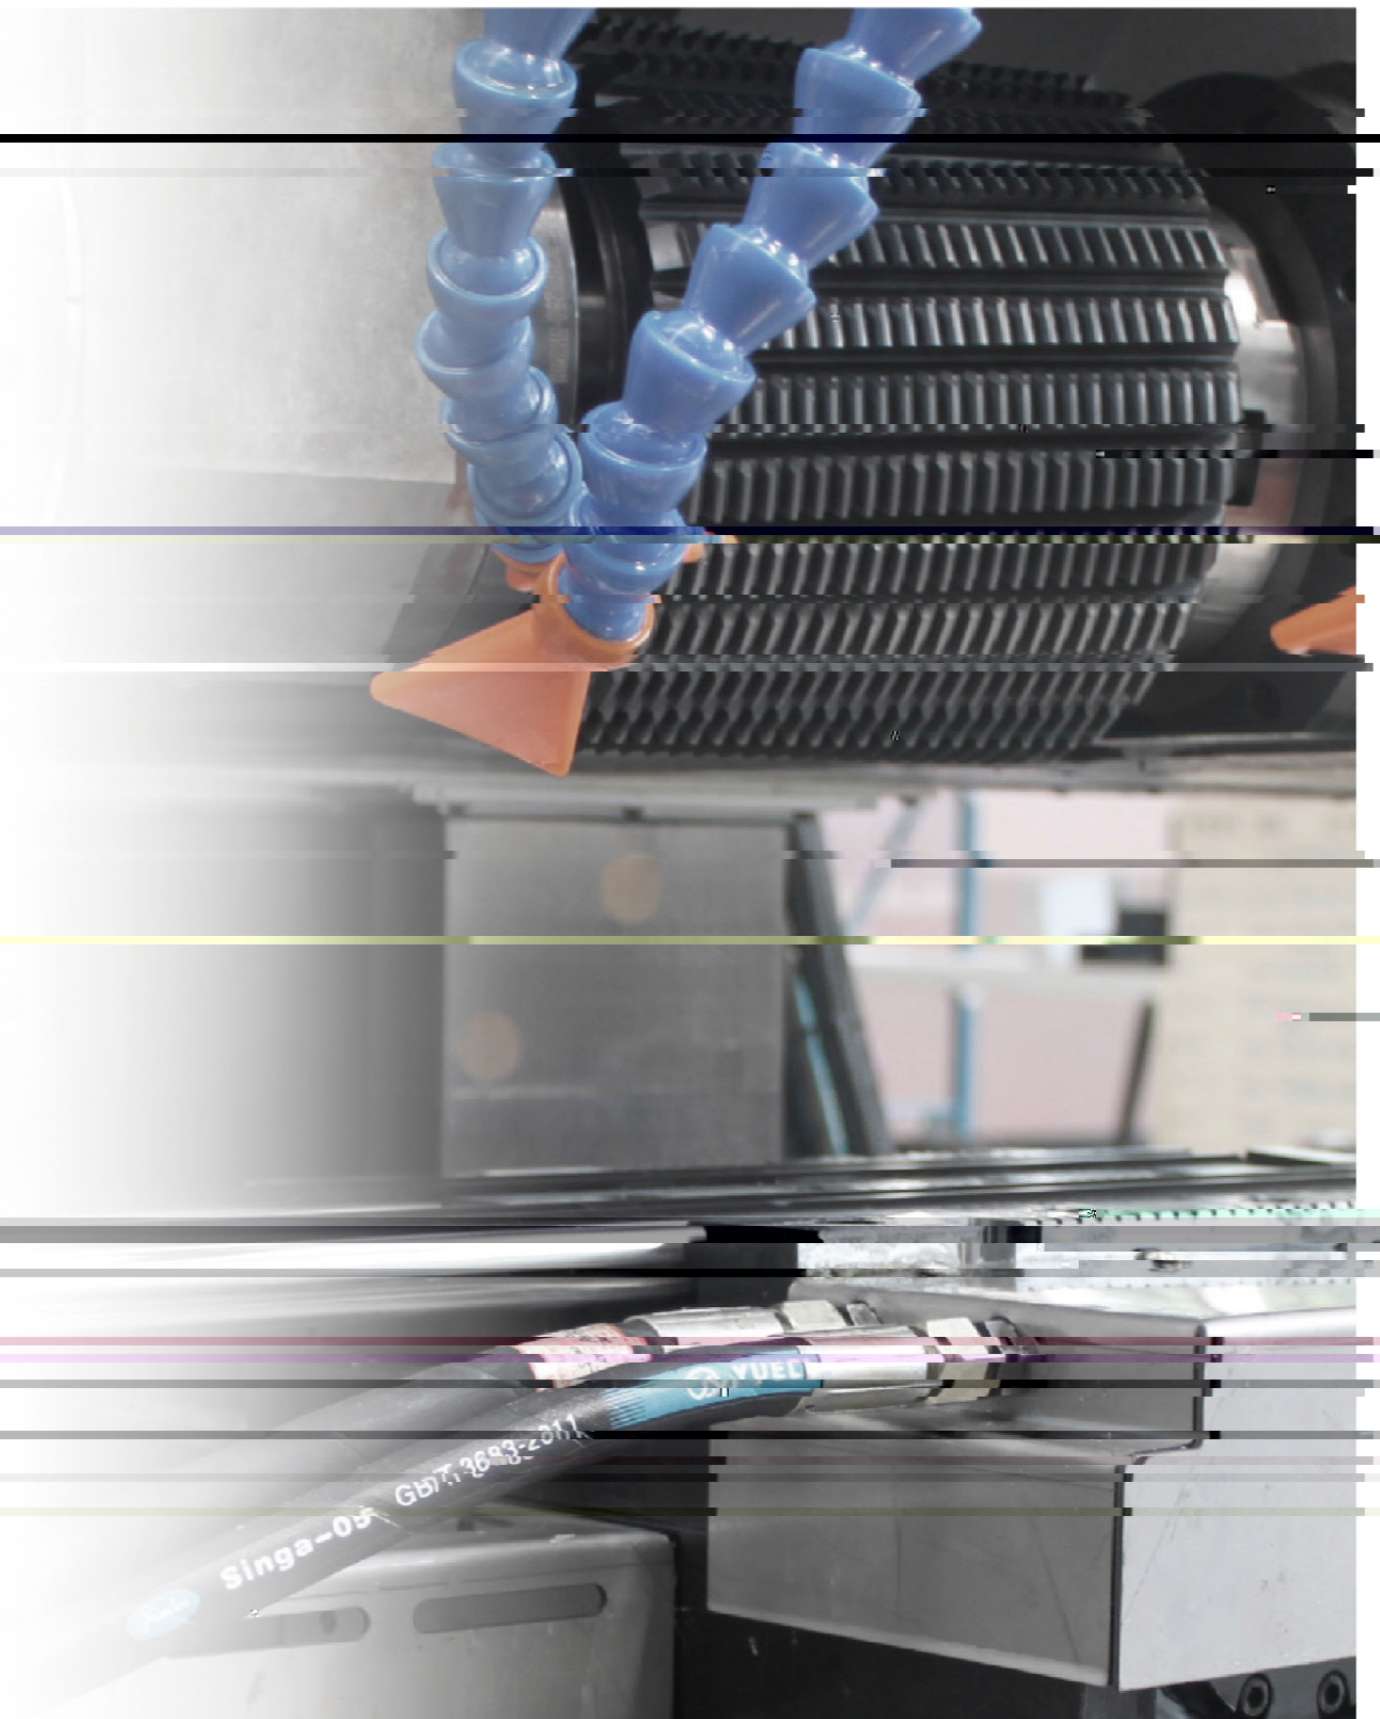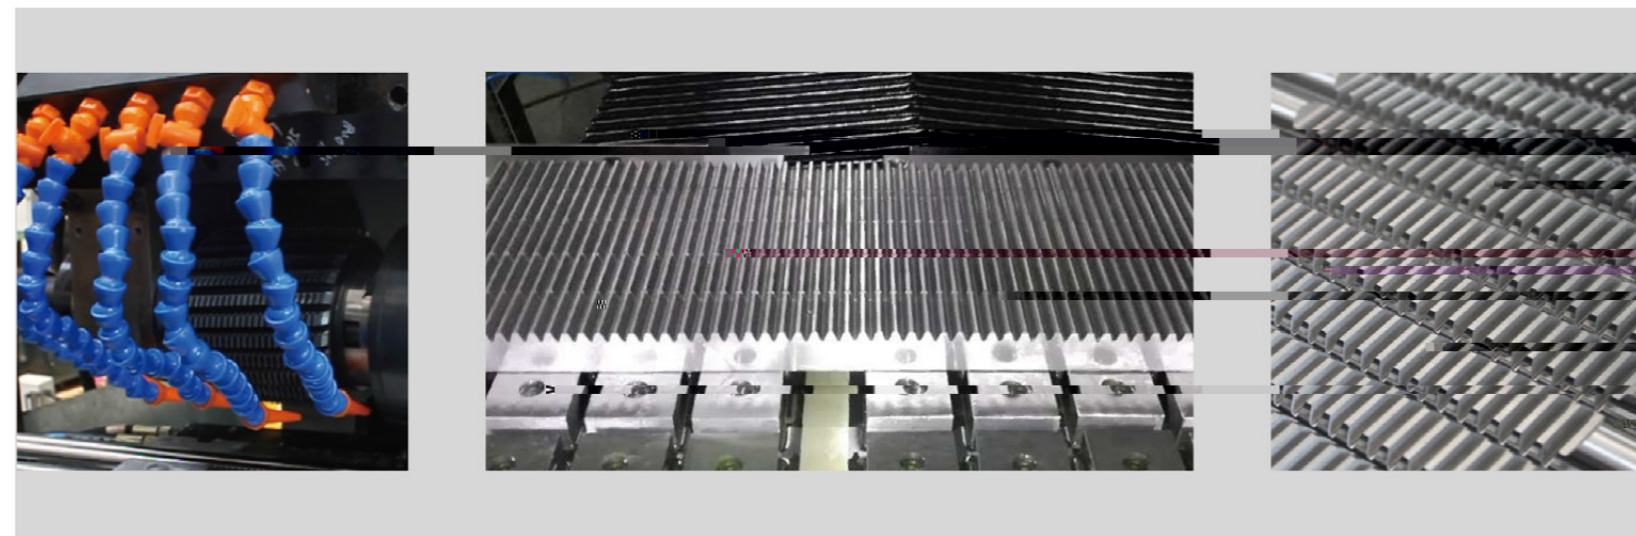

关于我们

匠心制造

核心技术

1

2

3

4

5

6

机床再制造

# 数控齿条插齿机


## CNC RACK GEAR SHAPING MACHINE

### 机床特点

1. 机床刚性高: 机床铸件采用优质铸铁, 接合面高精度刮研联接; 导轨采用TF软带减摩滑轨, 抗振性好; 大直径刀轴和短的主轴传动链, 圆周吃刀深度大;
2. 机床精度高: 刀架旋转调整螺旋角, 直齿刀具加工斜齿, 结构简单, 受行程精度影响小; 同时轴套动密封性能强, 在工作台行程精度, 精密的研导向套, 刚性高; 双V型导轨结构, 可以消除微量回差;
3. 机床切削效率高: 机床主轴电机11KW, 主轴冲程线速度30m/min, 圆周吃刀量大; YKR5832机床配静压刀架体, 主轴冲程线速度可达40m/min; 设计安全保护装置, 确保加工安全;
4. 机床适配性: 机床数控系统采用SIEMENS 828D; 大流量冷却, 确保冷却充分; 可选配夹具、单机自动上下料等。

### MACHINE TOOL FEATURES

1. The machine rigidity is good: the machine casting is made of high quality cast iron, high precision scraping joint surface, The guide rail adopts TF soft band frictionless guide rail, which has good vibration resistance; Large diameter tool shaft and short spindle driving chain, large circumference cutting depth.
2. High precision of machine tool: the tool holder rotates to adjust the spiral angle, the straight tooth tool processes the helical tooth, and the structure is simple; variable lead high-precision turret worm gear pair and servo motor coaxially drive high-precision ball screw leads; with high general accuracy, precision straight guide sleeve, double A grade double A grade rack gear shaper cutter, and the cutting accuracy reaches national standard.
3. The cutting efficiency of the machine tool is high: the spindle motor of the machine tool is 11KW, the peripheral cutting depth is large, YKR5832 machine tool is equipped with static pressure tool holder, the peripheral cutting speed can reach 40m/min, and the safety protection device to ensure processing safety;
4. Machine tool adaptability, The CNC system of machine tool adopts SIEMENS 828D. Large flow cooling, ensure adequate cooling; optional fixture, single automatic loading and unloading, etc.

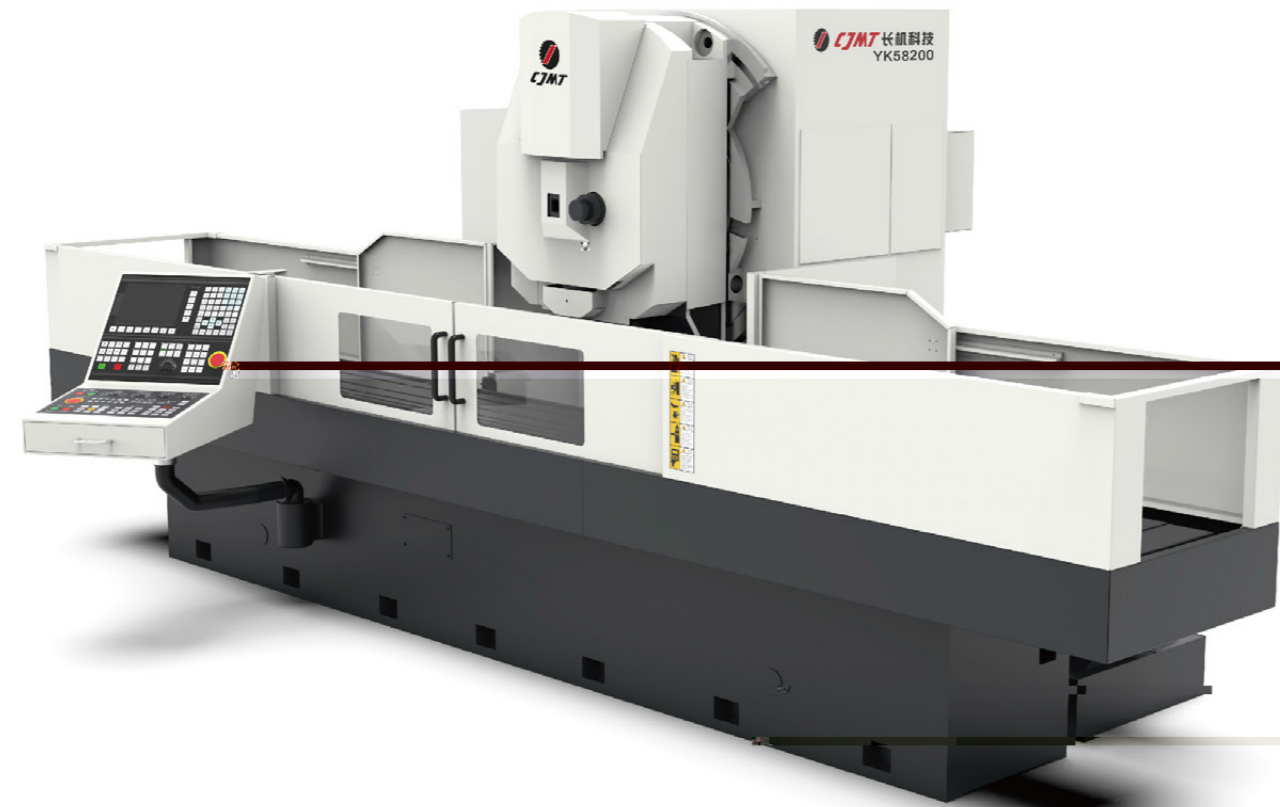


### 技术参数 THE MAIN PARAMETERS

名称 Description	型号 Type				
	YKR5832	YK58125	YK58200	YK58300	
最大加工工件长度 Max. machining length (bright tooth)	mm	2000	1200	1000	1000
最大模数 Max. module	mm	4	12	12	12
最大加工工件倾斜角 Max. angle of inclination	°	±20°	±30°	±30°	±30°
插齿刀最大冲程长度 Max. cutter stroke length	mm	100	160	160	160
插齿刀轴轴径 Cutter shaft diameter	mm	125-125	60-200	60-200	60-200
插齿刀行程位置调整量 Adjusting amount of cutter travel	mm	30-50	50-70	50-70	50-70
工作台切向进给速度 Tangent feed speed of worktable	mm/min	0~3000	0~1000	0~1000	0~1000
插齿刀让刀量 Cutter relieving	mm	0.3	≥0.5	≥0.5	≥0.5
插齿刀安装轴径直径 Cutter arbor diameter	mm	31.743	31.743	31.743	31.743
工作台面尺寸 Worktable size	mm	740x400	1350x490	2150x490	3150x490
插齿刀轴线至工作台中心平面距离 Center distance cutter/worktable	mm	-	-110-270	-110-270	-110-270
插齿刀安装端面至工作台面距离 Distance cutter mounting surface/worktable surface	mm	110-300	160-370	160-370	160-370
机床总功率 Total power	kW	约8.5	约30	约30	约30
机床重量 Total weight	t	约6	约11	约13	约15
主机外形尺寸(长×宽×高) Main Machine Dimension	m	2.73x1.9x2.3	2.4x4x3	2.4x6x3	2.4x9x3

注:  
1. 重量仅供参考, 最终以实物为准;  
2. 外观防护分为半防护、全防护, 可根据实际需求进行选择;  
3. 公司持续创新研发设计, 本手册中各系列产品参数将持续优化。

Note:  
1. The weight is for reference only, and the actual product shall prevail;  
2. The appearance protection of this machine tool has two options: semi-protection and full protection, which can be selected according to actual needs;  
3. We continue to innovate machine tool design. The parameters of each series of products in this manual are for reference only. If you have any inquiry, please contact us for update.

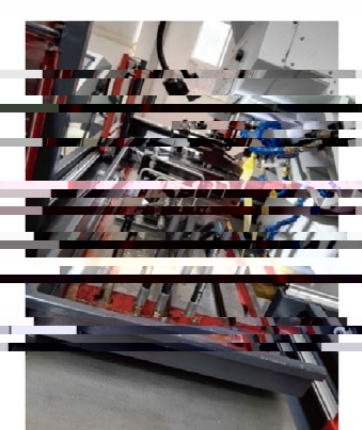

关于我们  
心制造  
核心技术  
1  
2  
3  
4  
5  
6  
机床制造

# 数控齿条铣齿机

## CNC RACK GEAR MILLING MACHINE

### 机床特点


YK85125A和YK85200A是大改进机型，精度更稳定和效率提高50%；

- 1、机床刚性好：机床铸件采用高强度铸件+拓扑优化设计；碳钢导轨+随动锁紧；刀具主轴传动链全消除，轴承、静压双支撑，SIEMENS伺服主轴电机驱动，力矩特性好；
- 2、机床精度高：工作台全闭环，静压导轨，确保分度高精度；主轴驱动轮独立支撑，HSK刀柄定位，回转精度高；双AA级齿条铣刀，切削精度国际领先；
- 3、机床切削效率高：机床主轴电机45KW(S3)，利用率可达85%；设计刀具保护和全保护装置，确保高速加工安全；
- 4、机床适配性：机床数控系统采用SIEMENS 828D；排屑系统配三级过滤净化、大流量冷却、冲屑；导轨防护大升级，确保大流量冲屑安全；全防护或半防护，确保机床冲洗、冷却充分；可选配夹具、单机自动上下料等。

### MACHINE TOOL FEATURES




YK85125A and YK85200A are greatly improved in rigidity, accuracy and cutting efficiency.

1. Good rigidity of machine tool: machine tool castings adopt high strength castings and Topology optimization design; inlaid steel guide rail, follow-up locking; tool spindle drive chain full clearance, bearing static pressure double support, SIEMENS servo spindle motor drive, good torque characteristics;
2. High accuracy of the machine tool: full closed-loop workbench, static guide to ensure high precision indexing; Spindle drive wheel independent support, HSK shank positioning, high rotation accuracy; Double AA grade rack milling tool, cutting accuracy reaches national standard 7;
3. The cutting efficiency of the machine tool is high: the spindle motor of the machine tool is 45KW (S3), and the utilization rate can reach 85%; design tool protection and safety protection devices to ensure the safety of high-speed machining;
4. Machine tool adaptability: the CNC system of the machine tool adopts SIEMENS 828D; chip removal system is equipped with three-stage filtration, large flow cooling and chip punching. The guide rail protection is greatly upgraded to ensure the safety of large flow chip punching; fully-guarded or semi-guarded to ensure accurate flushing and cooling of the machine.

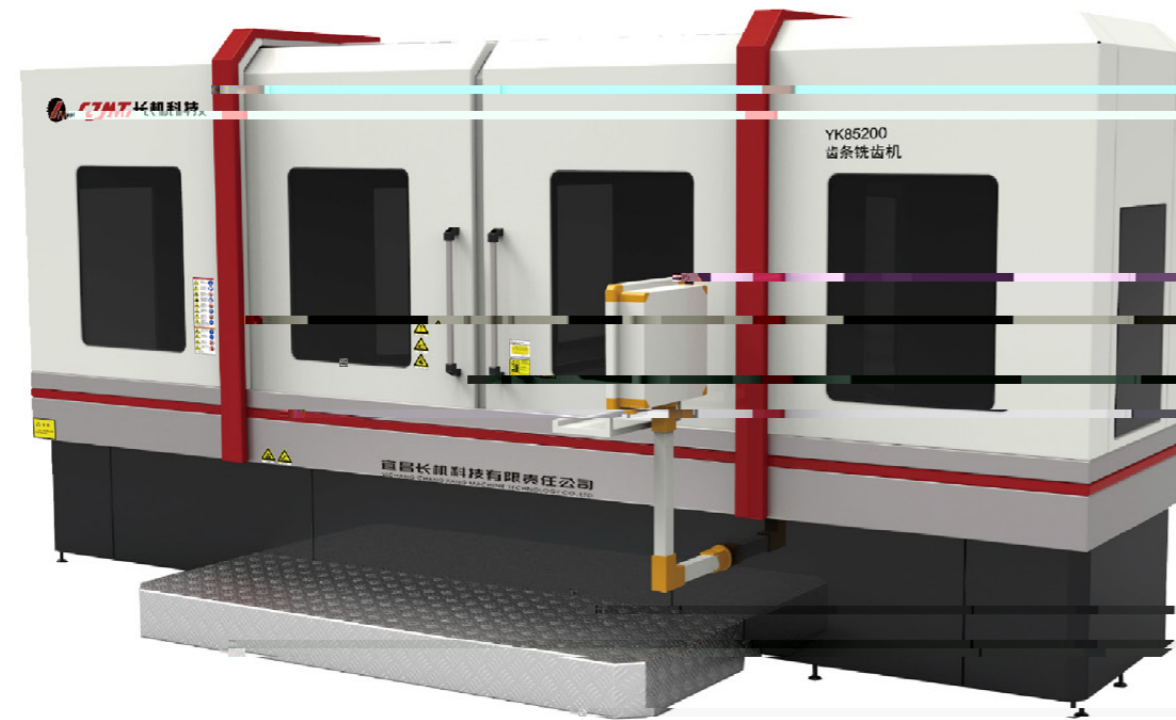

### 技术参数 THE MAIN PARAMETERS

名称 Description		型号 Type	
		YK85125A	YK85200A
最大加工工件长度(直齿) Max. workpiece length (straight tooth)	mm	1250	2000
最大加工模数 Max. module	mm	30	30
加工斜齿条角度范围 Max. helix angle	°	±25	±25
最大加工宽度 Max. workpiece width	mm	400	400
工作台最大承重 Max. load capacity	kg	3000	5000
工作台尺寸 Worktable diameter	mm	600 x 1250	805 x 2900
铣刀最大尺寸 Max. size of milling cutter	mm	φ320 x 180 齿深	φ320 x 180 齿深
最大装刀宽度 Max. mounting width of milling cutter	mm	300	300
主轴电机功率 Main spindle motor power	kW	37 (S1)	37 (S1)
主轴转速 Main spindle speed	r/min	40~350	40~350
主轴装刀直径 Max. diameter of spindle cutter holder	mm	Φ60	Φ60
刀具纵向进给速度 Speed of cutter longitudinal feed	mm/min	5000	5000
刀具垂直进给速度 Speed of cutter vertical feed	mm/min	2000	2000
工作台横向进给速度 Speed of worktable transverse feed	mm/min	10000	10000
机床重量 Total weight	t	约17	约21
主机外形尺寸(长×宽×高) Main Machine Dimension	m	3.56x4.17x3.1	3.72x7.35x3.1

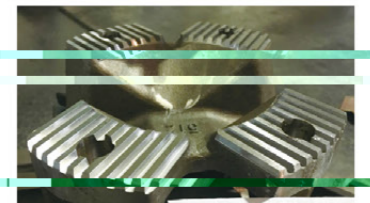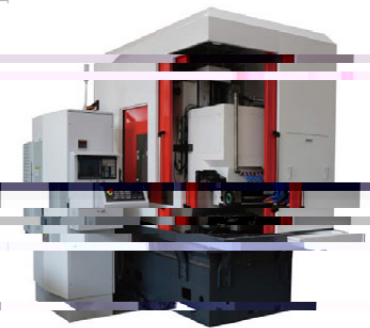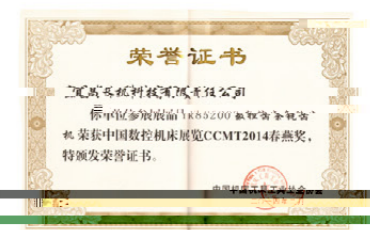

- 注：  
1. 重量仅供参考，实际产品以实物为准。  
2. 外观防护分半防护、全防护，用户可根据实际需要进行选择。  
3. 公司将不断创新机床设计，本手册中各系列产品之参数将持续优化。

- Note:  
1. The weight is for reference only, and the actual product shall prevail;  
2. The appearance protection of the machine tool has two options: semi-protection and full protection, which can be selected according to actual needs;  
3. We continue to innovate machine tool design, the parameters of each series of products in the manual are for reference only, in your next update, please contact us for update.

# 数控齿条磨齿机

## CNC RACK GEAR GRINDING MACHINE

### 机床特点

适用于各类直、斜齿条齿面的磨削加工,特别适合各种精密齿条硬齿面的磨削。机床主要技术特点:

1. 机床砂轮机械主轴由西门子主轴伺服电机驱动,内置动平衡仪,自动监测并实现砂轮的自动平衡,砂轮恒线速度磨削;
2. 机床配AE自动对刀系统;
3. 砂轮修整金刚滚轮采用电主轴直驱,运转精度及可靠性强;
4. 配备了高灵敏性高精度的在位检测系统;
5. 机床排屑系统实现了磨削油温度的恒温控制;
6. 机床具有断电自动回退功能,确保机床运行的安全。

### MACHINE TOOL FEATURES



CNC rack gear grinding machine is widely used in the grinding process of various precision rack gears. Machine tool main technical Feature:

1. The Spindle is driven by Siemens servo motor, built-in dynamic balancing instrument to automatically monitor and realize the automatic balance of grinding wheel. And keep constant linear grinding speed.
2. Machine with AE automatic cutter match system.
3. Grinding wheel dressing diamond roller is directly driven by motorized spindle. With high rotation accuracy and reliability.
4. Equipped with high sensitivity and high precision in place measurement system.
5. The chip removal system realizes the constant temperature control for grinding oil.
6. Automatically retract function when power is off to ensure the safe operation.



### 技术参数 THE MAIN PARAMETERS

名称 Description		型号 Type	YK78200
最大加工模数 Max. module	mm		18
最大加工工件长度 Max. workpiece length	mm		2000
加工斜齿条最大角度 Max. helical angle	°		±20
主轴电机功率 Spindle motor power	kW		45
砂轮主轴转速 Grinding wheel spindle speed	r/min		12400
最大砂轮宽度 Maximum grinding wheel width	mm		105
砂轮直径 Grinding wheel diameter	mm		φ220±0.05
主轴砂轮孔安装直径 Mounting diameter of spindle grinding wheel hole	mm		φ152.4 (6inch)
金刚滚轮直径 Diameter of diamond roller	mm		φ200
X轴最大行程 Max. stroke of X-axis	mm		500
X轴最大进给速度 Maximum feed speed of X-axis	mm/min		6000
Y轴最大行程 Max. stroke of Y-axis	mm		2000
Z轴最大行程 Max. stroke of Z-axis	mm		400
Z1轴最大行程 Max. stroke of Z1-axis	mm		100
Y1轴最大行程 Max. stroke of Y1-axis	mm		125
机床总功率 Total machine power	kW		约110
机床重量 Total weight	t		约23
主机外形尺寸(长×宽×高) Main Machine Dimension	m		5.98×3.77×2.34

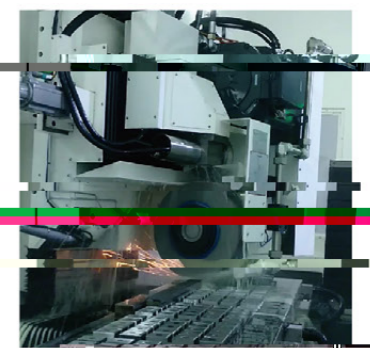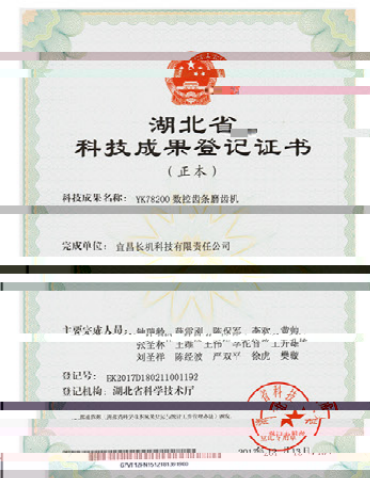

- 注:
1. 重量仅供参考,具体以实物为准;
  2. 外观防护分半防护、全防护,防护等级可根据需要进行选择;
  3. 公司持续创新机床设计,本手册中各系列产品参数将持续更新。

Note:

1. The weight is for reference only, and the actual product shall prevail.
2. The appearance protection of the machine tool has two options: semi-protection and full protection; which can be selected according to actual needs;
3. We continue to innovate machine tool design. The parameters of each series of products will be updated for reference only. If you have any inquiry, please contact us for the update.

关于我们

匠心制造

核心技术

1

2

3

4

5

6

机床再制造

# 数控强力齿条铣齿机

## CNC POWER RACK GEAR MILLING MACHINE

### 机床特点

1. 机床刚性好: 机床铸件采用高强度铸件、拓普优化设计; 镶钢导轨、随动锁紧; 刀具主轴传动链全消隙, 轴承、静压双支撑, SIEMENS伺服主轴电机驱动, 力矩特性好;
2. 机床精度高: 高精度滚珠丝杠、主轴回转精度高, 有效保证零件切削精度和精度;
3. 机床切削效率高: 机床主轴电机45KW(S3), 利用率可达85%; 设计刀具保护和安全保护装置, 确保高速加工安全;
4. 机床适配性: 机床数控系统采用SIEMENS 828D; 排屑系统配三级过滤净化、大流量冷却、冲屑等装置, 确保机床运行安全, 提高机床使用寿命。



### MACHINE TOOL FEATURES

1. Good rigidity of machine tool: machine tool castings adopt high strength castings and Topology optimization design ; inlaid steel guide rail, self-locking , tool spindle drive chain full clearance, bearing, static pressure double support, SIEMENS servo spindle motor drive, good torque characteristics;
2. High precision of the machine tool: the spindle drive wheel is independently supported, and the spindle rotation precision is high. The rack milling machine has high accuracy reaches national standard 6.
3. The cutting efficiency of the machine tool is high: the spindle motor of the machine tool is 45KW (S3), and the utilization rate can reach 85%. design tool protection and safety protection devices to ensure the safety of high-speed machining;
4. Machine tool adaptability ; the CNC system of machine tool adopts SIEMENS 828D ; and the chip removal system is equipped with the large flow filtration, large flow cooling and chip punching. The guide rail protection is greatly upgraded to ensure the machine is used and cooled adequately, improve machine tool life, automatic loading and unloading, etc.



### 技术参数 THE MAIN PARAMETERS

名称 Description		型号 Type
		YK8532A
最大加工模数 Max. Module	mm	12
最大加工工件长度 Max. Workpiece Length	mm	300
加工斜齿条最大角度 Max. Helical Angle	°	±25 (夹具保证)
主轴电机功率 Main Motor Power	kW	37
主轴转速 Spindle Speed	r/min	40-3000
最大铣刀宽度 Max. Cutter Width	mm	300
铣刀外径直径 Milling Cutter Diameter	mm	Φ180+2倍刀深~Φ320
主轴装刀杆直径 Milling Cutter Arbor Diameter	mm	Φ60
X轴最大进给速度 Max. Feeding speed of X Axis	mm/min	1200
X轴最大行程 Max. Travel range of X Axis	mm	500
Z轴最大行程 Max. Travel range of Z Axis	mm	400
Z轴最大进给速度 Max. Feeding speed of Z Axis	mm/min	500
机床总功率 Total power	kW	约51
机床总重量 Total weight	t	约10
主机外型尺寸(长X宽X高) Main Machine Dimension	mm	3.3X2X2.8

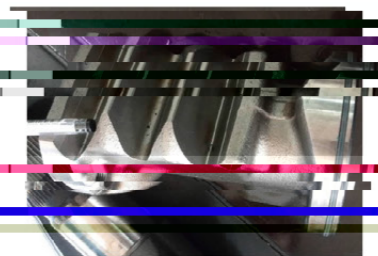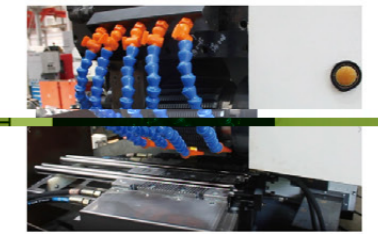

注: 1. 重量仅供搬运起重时参考, 具体以实物为准;  
2. 外观防护分为半防护、全防护, 用户可根据实际需求进行选择;  
3. 公司持续创新研发, 部分参数仅供参考, 如有更新, 参数将持续优化。

Note: 1. The weight is for reference only, and the actual product shall prevail;  
2. The appearance protection of this machine tool has two options: semi-protection and full protection, which can be selected according to actual needs;  
3. We continue to innovate machine tool design. The parameters of each series of products in this manual are for reference only. If you have any inquiry, please contact us for the update.

# 数控强力齿条磨齿机

## CNC POWER RACK GEAR GRINDING MACHINE

### 机床特点

1. 机床刚性好: 机床结构采用典型桥式床身结构, 或强磨床身, 并优化双层导轨设计, 采用高刚性之轴, 大功率水冷伺服电机驱动, 配合高精度滚珠丝杠, 恒线度磨削; 确保安全; 修整主轴等轴径设计, 驱动、定位分离设计, 确保修整无侧压;
2. 机床精度高: 机床导轨采用直线导轨和静压阻尼块组合方式, 提高导轨抗振性; 全闭环设计, 确保定位高精度; 电机外置或水冷, 才来流温温溢机, 保持恒温;
3. 机床切削效率高: 机床配最大电机功率115KW, 利用率高达99%; 适用于深齿磨削工艺; 配有自动进给功能, 确保安全; 配备砂轮修整器或砂轮修整系统, 大流量冷却液冲屑, 流量开关保护, 确保冷却可靠;
4. 机床适配性: 机床数控系统采用SIEMENS 828D或840DSL; 根据加工工件的不同, 配不同磨削软件; 配置台式修整器, 可选配顶置式修整器; 能满足在线修整要求; 全防护罩设计, 配静电式油雾分离器; 可选配夹具、单机自动上下料等。

### MACHINE TOOL FEATURES.

1. Good rigidity of machine tool: The machine tool adopts a water-cooled spindle, and the high-power water-cooled grinding spindle motor is equipped with automatic safety protection system, ensuring safety; grinding spindle diameter design, drive and positioning separation design, ensuring grinding without side pressure;
2. High precision of machine tool: The guide rail of machine tool adopts the combination of linear guide rail and static pressure damping block to improve the guide rail resistance to guide rail; full closed loop design, ensuring high positioning accuracy; motor external or water-cooled, ensuring constant temperature;
3. The cutting efficiency of machine tool is high: the maximum motor power of machine tool is 115KW, and the utilization rate is up to 99%. Suitable for deep grinding process, equipped with power-off back function to ensure safety, with suction circulation belt filter chip removal system, large flow cooling liquid flushing, flow switch protection, to ensure reliable cooling;
4. Machine tool adaptability; the CNC system of machine tool adopts SIEMENS 828D or 840DSL, according to the different processing workpiece, equipped with different grinding software; configure the table-mounted dresser, optional top-mounted dresser; can meet the requirements of online dressing; full-guard design, with electrostatic oil mist separator, optional fixture, single machine automatic loading and unloading, etc.



### 技术参数 TECHNICAL PARAMETERS

名称 Description	型号 Type	YK7832		YKA7832	
最大加工模数 Max. Addendum	mm	20	20	12	12
最大加工齿顶圆长度 Max. Addendum Length	mm	320	320	320	320
主电机功率 Main Motor Power	kW	110	110	50	50
SP1轴转速 SP1 Shaft Speed	r/min	1-4000	1-4000	1-4000	1-4000
SP2轴转速 SP2 Shaft speed	r/min	4500	4500	4500	4500
最大砂轮宽度 Max. Grinding Wheel Width	mm	740	740	740	740
最大砂轮直径 Grinding wheel diameter	mm	Φ500	Φ500	Φ500	Φ500
主电机砂轮安装直径 Main Motor Grinding Wheel Mounting Diameter	mm	Φ203.2mm (8inch)	Φ203.2mm (8inch)	Φ203.2mm (8inch)	Φ203.2mm (8inch)
X轴最大行程 Max. Travel range of X-axis	mm	1700	1700	1700	1700
X轴最大进给速度 Max. Feeding speed of X-axis	m/min	10	10	10	10
Y轴最大行程 Max. Move Distance of Y-axis	mm	480	480	480	480
Y轴最大进给速度 Max. Feeding speed of Y-axis	m/min	5	5	5	5
Z轴最大行程 Max. Move Distance of Z-axis	mm	450	450	450	450
Z轴最大进给速度 Max. Feeding speed of Z-axis	m/min	10	10	10	10
金刚砂轮直径 Emery wheel diameter	mm	160	160	160	160
砂轮中心至工作台面距离 Distance from grinding wheel center to worktable	mm	202±0.05	202±0.05	202±0.05	202±0.05
工作台面安装尺寸(长度X宽度) Workbench mounting dimension (length X width)	mm	1250X375	1250X375	1250X375	1250X375
移动工作台最大承重 Maximum load-bearing capacity of mobile worktable	kg	1500	1500	1500	1500
机床总重量 Total weight	t	约12	约12	约12	约12
主机外型尺寸(长X宽X高) Main Machine Dimension	mm	3150X2300X2100	3150X2300X2100	3150X2300X2100	3150X2300X2100

- 注:  
1. 重量仅供参考, 具体以实物为准;  
2. 外观防护分半防护、全防护, 用户可根据实际需要进行选择;  
3. 公司持续创新机床设计, 本手册中各系列产品参数将持续优化。

- Note:  
1. The weight is for reference only, and the actual product shall prevail;  
2. The appearance protection of this machine tool has two options: semi-protection and full protection, which can be selected according to actual needs;  
3. We continue to innovate machine tool design. The parameters of each series of products in this manual are for reference only. We will have the right to adjust or retract for the update.